





F-70



Gehäuse Housing	Polycarbonat klar Polycarbonate clear
Befestigung Mounting	Schrauben Screw
Lichtquelle Light source	24 MidPower LED, kaltweiß coolwhite
Schalter Switch	ja beleuchtet / nein yes illuminated / no
Dimmbar Dimmable	nein no

Voltage	Watt	Φ-Lm	IP50	IP67
12 24	5	400		
				HD

Halbwertwinkel:
Half Peak Divergence:
60°

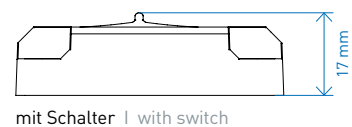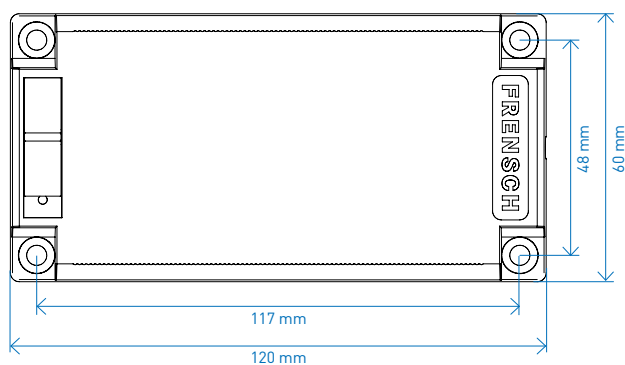

F-70 Standard		Switch	Housing Color	Order No.
	F-70 12 24 Volt/DC coolwhite	yes illuminated	clear	0518
	F-70 12 24 Volt/DC coolwhite	no	clear	0519
F-70 Heavy Duty		Switch	Housing Color	Order No.
	F-70 HD 12 24 Volt/DC coolwhite	yes illuminated	clear	0516
	F-70 HD 12 24 Volt/DC coolwhite	no	clear	0517