



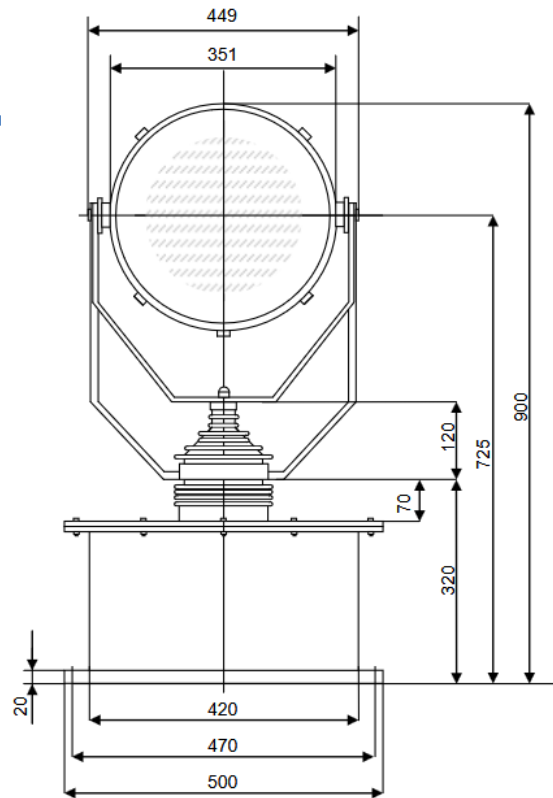

EFA 351 LED 24 V -150 W

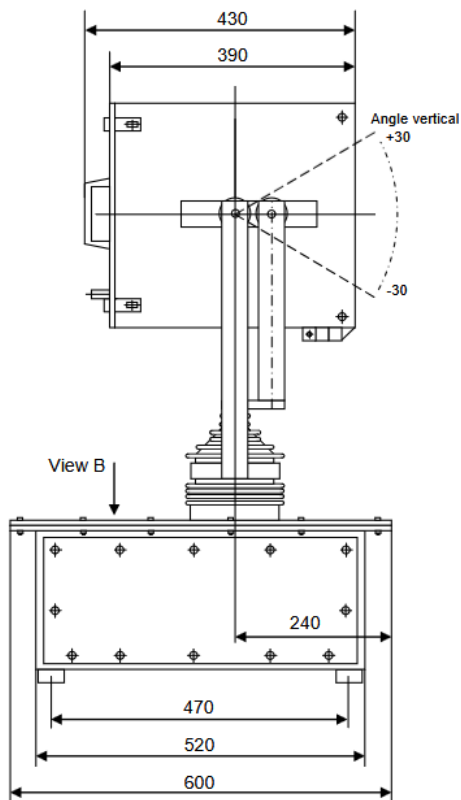

Pesch Marinescheinwerfer
Ortsring 2
D - 21423 Winsen/Luhe

Tel.: +49 4171 5684
E-Mail: sales@seematz.de
<https://www.seematz.de>



EFA 351 LED

24 V -150 W

Type: EFA351LED24150wb
Motor Control: type 24VDC

Construction features :

Case and all other aluminium parts are made of ALMg3, non magnetic.

Front Pane:

bi-vetral glas, resistant to temperature changes

Sealing:

Seal for front Pane: silicone tube

Seal for plug-in unit: square bar rubber

LED Type:

Cree XP-G3

Technical data lamp:

Power	150 VA
Voltage	24 V
Current intensity	8,5 A
Luminous flux	21879 lm
Average burning life	approx.50000 hours

Searchlight:

DIN-Range at 1 Lux:	875 m
IES-Range at ¼ Lux :	1750 m
Beam with at 50 % Imax:	11 °
Light spot size at target	±170 m
Power input 24V 150 VA	
Protective System IP 56	

Turning range:

Horizontal : +/- 165° (optional up to +/-190°)
Vertical : +/- 30° (optional +/-35°)

Swiveling time horizontal approx 20 sec for 330°
Swiveling time vertical approx 45 sec for 60°

Motor control:

Power	100 W
Voltage	24 VDC

Options:

-additional turning range