

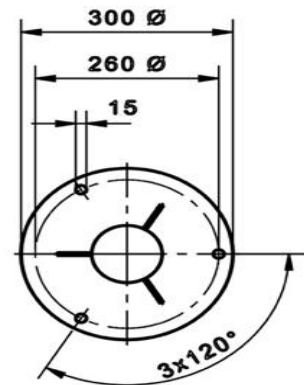


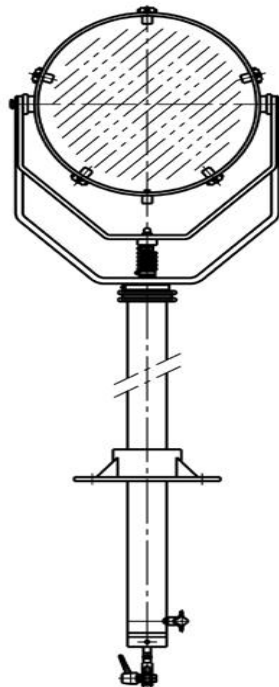

WH 351 LED 24 V -150 W

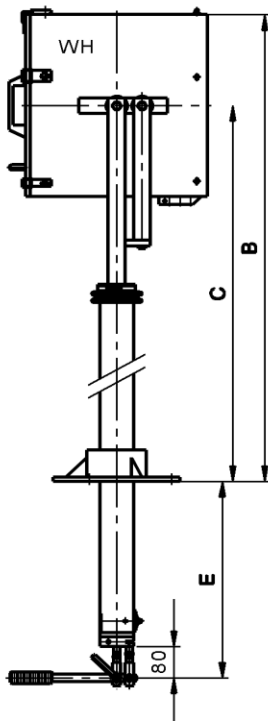

Pesch Marinescheinwerfer
Ortsring 2
D - 21423 Winsen/Luhe

Tel.: +49 4171 5684
E-Mail: sales@seematz.de
<https://www.seematz.de>



WH 351 LED

24 V -150 W

Type: WH351LED24150
Electrical data: 24V 150 W

Construction features :

Case and all other aluminium parts are made of ALMg3, non magnetic.

Front Pane:

bi-vetral glas, resistant to temperature changes

Sealing:

Seal for front Pane: silicone tube

Seal for plug-in unit: square bar rubber

LED-Type :

Cree XP-G3

Technical data lamp:

Power	150 VA
Voltage	24 V
Current intensity	8,5 A
Luminous flux	21879 lm
Average burning life	50000 Hours

Searchlight:

DIN-Range at 1 Lux:	875 m
IES-Range at ¼ Lux :	1750 m
Beam with at 50 % Imax:	11°
Light spot size at target	± 170 m
Power input 24V 150 VA	
Protective System IP 56	

Turning range:

Horizontal : +/- 165°
Vertical : +/- 30°

Steering Type :

WH (deck high) Ø 80mm
H = 1000mm (standard size)
E = 500mm (standard size)

Options:

- height can be customized (changing of size „H“)
- under deck length can be costumized (changing of size „E“)