



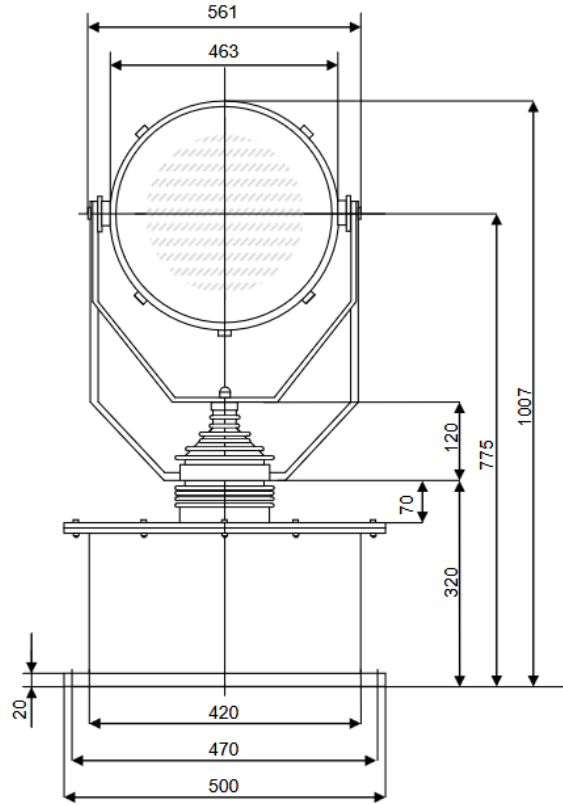

EFS 463 LED 230 V -205 W

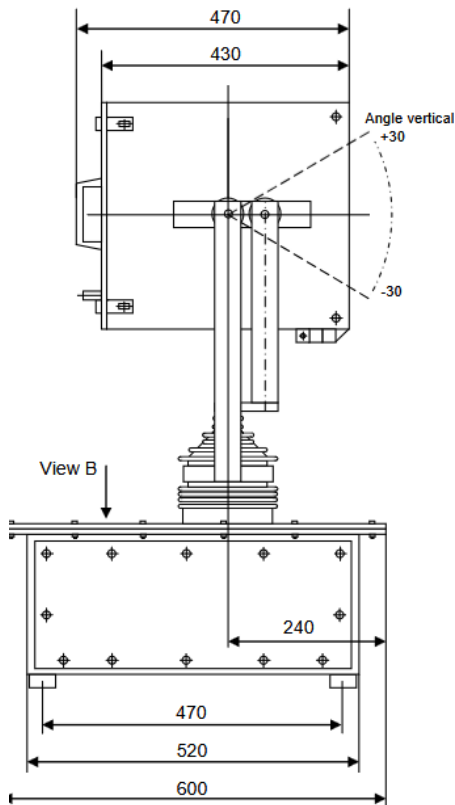

Pesch Marinescheinwerfer
Ortsring 2
D - 21423 Winsen/Luhe

Tel.: +49 4171 5684
E-Mail: sales@seematz.de
<https://www.seematz.de>



EFS 463 LED

230 V -205 W

Type: EFS463LED230205nb
Motor Control: type 230VAC

Construction features :

Case and all other aluminium parts are made of ALMg3, non magnetic.

Front Pane:

bi-Veteral glas, resistant to temperature changes

Sealing:

Seal for front Pane: silicone tube

Seal for plug-in unit: square bar rubber

LED-Type :

Cree XQ-E

Electronic thermostat +30°C

Heating element 400 W in headunit and gearbox

Technical data lamp:

Power	205 VA
Voltage	230 V
Current intensity	1,15 A
Luminous flux	20345 lm
Average burning life	approx. 50000 Hours

Searchlight:

DIN-Range at 1 Lux:	3000 m
IES-Range at ¼ Lux :	6200 m
Beam with at 50 % Imax:	3°
Light spot size at target	± 157 m
Power input 230V	1140 VA
Protective System	IP 56

Turning range:

Horizontal :	+/- 165° (optional up to +/-190°)
Vertical :	+/- 30° (optional +/-35°)

Swiveling time horizontal approx 20 sec for 330°
Swiveling time vertical approx 45 sec for 60°

Motor control:

Power	500 W
Voltage	230 VAC

Options:

- up to 4 standard panels to control one Searchlight
- Multipanel for controlling more then one Searchlight
- additional turning range