



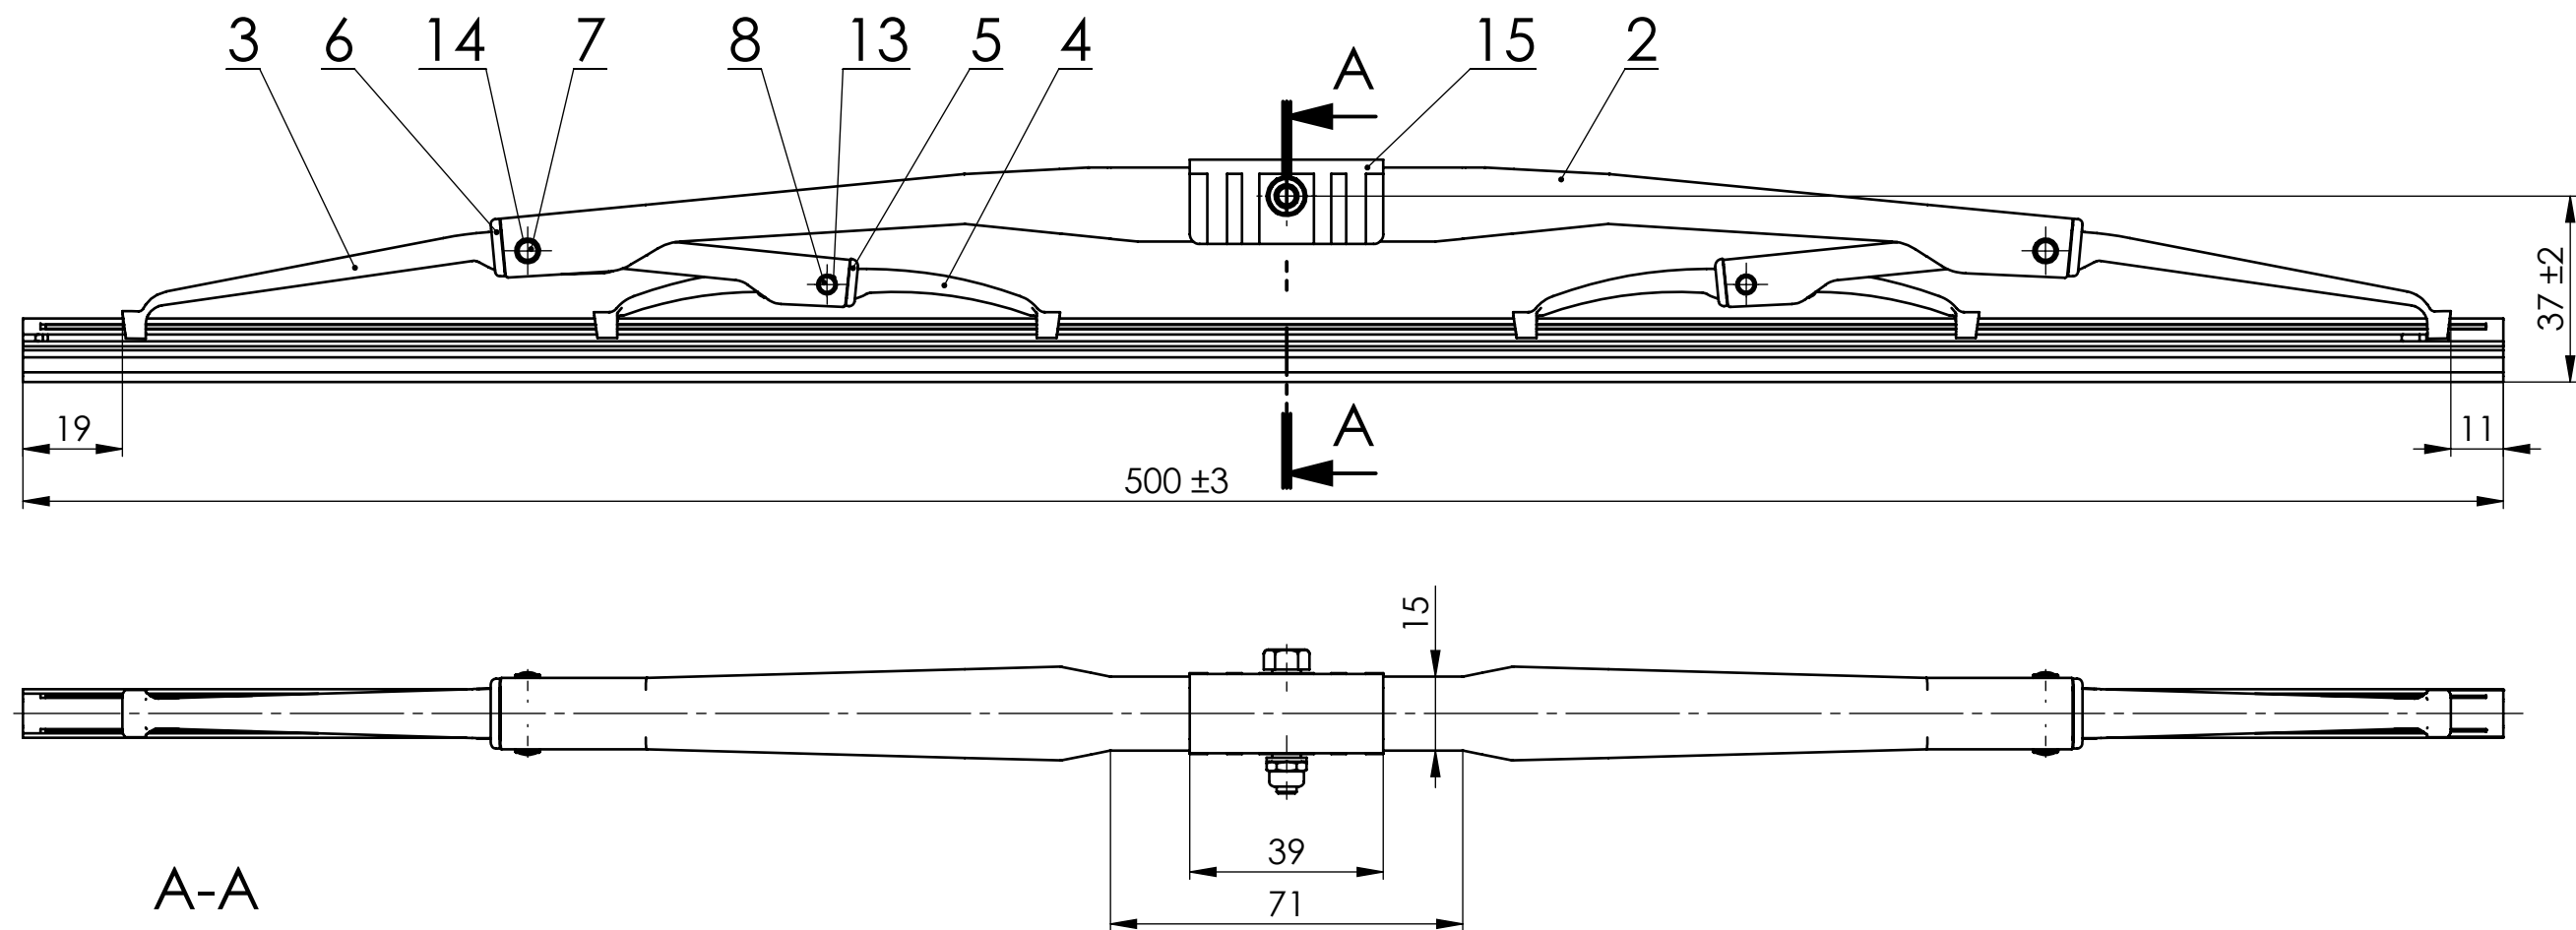

A-A
1,5:1

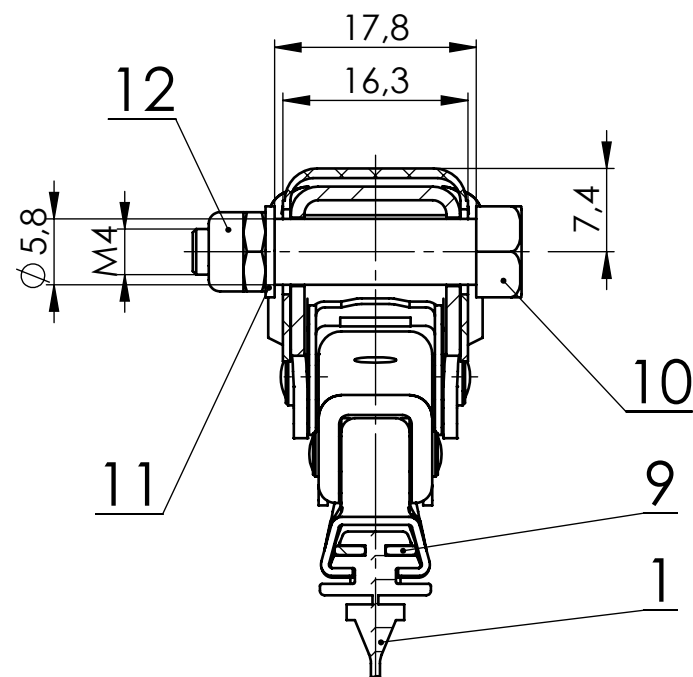

Test specification to EDS-M-7501
Wiper performance EDS-T-3402
* FAPROXYD 620 MAT MOT-GUM CZA RNA RAL 9005
Polyester powder paint
Gloss 12-23 (GE at 60°)
Thickness 60-80 [μm]

15	Adaptor	1	PBT		U1	
14	Sleeve	4	PBT		800.01.13	
13	Sleeve	4	PBT		800.01.12	
12	Self locking nut M4	1	A2	DIN 985		
11	Washer 4,3	1	A2	DIN 125A		
10	Screw M4	1	EN 1.4301	EN 10088-1	601.02.03 N	
9	Side spring	2	EN 1.4310	EN 10088-1	500.01.09	
8	Rivet	2	EN 1.4567	EN 10088-1	500.01.08	
7	Rivet	2	EN 1.4567	EN 10088-1	500.01.07	
6	Joint	2	PBT		500.01.06	
5	Joint	2	PBT		500.01.05	
4	Side lever	2	DX51D+Z275#0,7	EN 10346	500.01.04	*
3	Side sublever	2	DX51D+Z275#0,8	EN 10346	500.01.03	*
2	Main lever	1	DX51D+Z275#1,2	EN 10346	601.02.02	*
1	Rubber	1	Rubber		500.02.01	
Pos.	Part	Qty	Material	Norm	Drw. no.	Covers
	Name	Date	Sign	Name	General tolerances	Format
Dsgn.	S.Bogucki	27.07.2023		Wiper blade 500	ISO 2768-C	A3
Chk.	K.Kowalewski	27.07.2023		Drw. no.	Scale	
Acpt.	W.Perczyński	27.07.2023		500.11.00	1:1.5	