
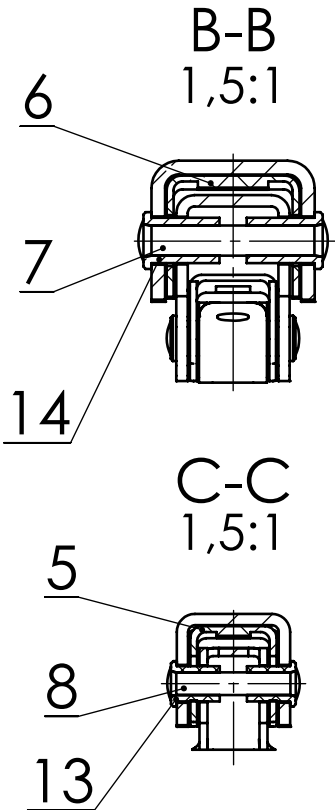
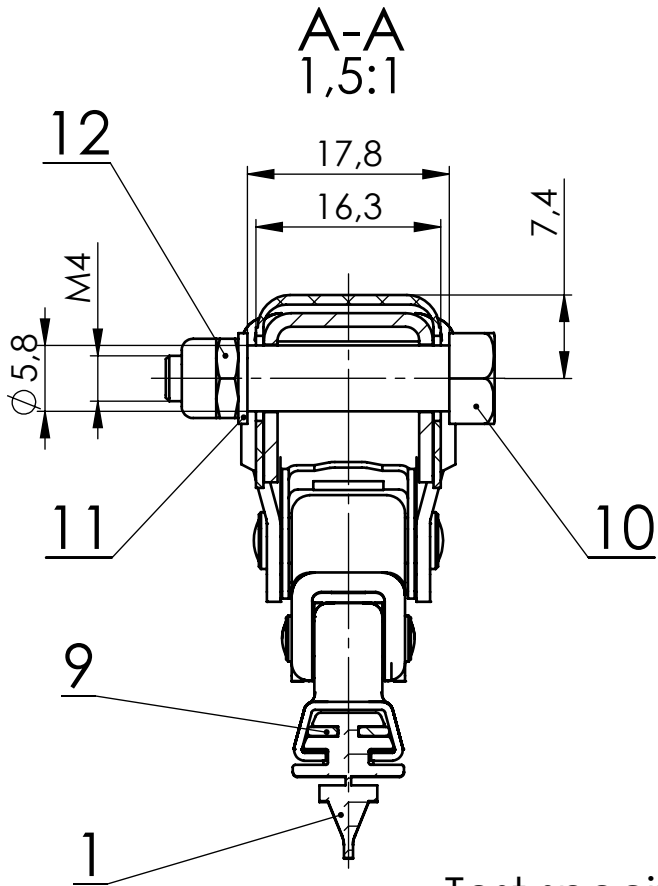


Pos.	Change	Date	Sign

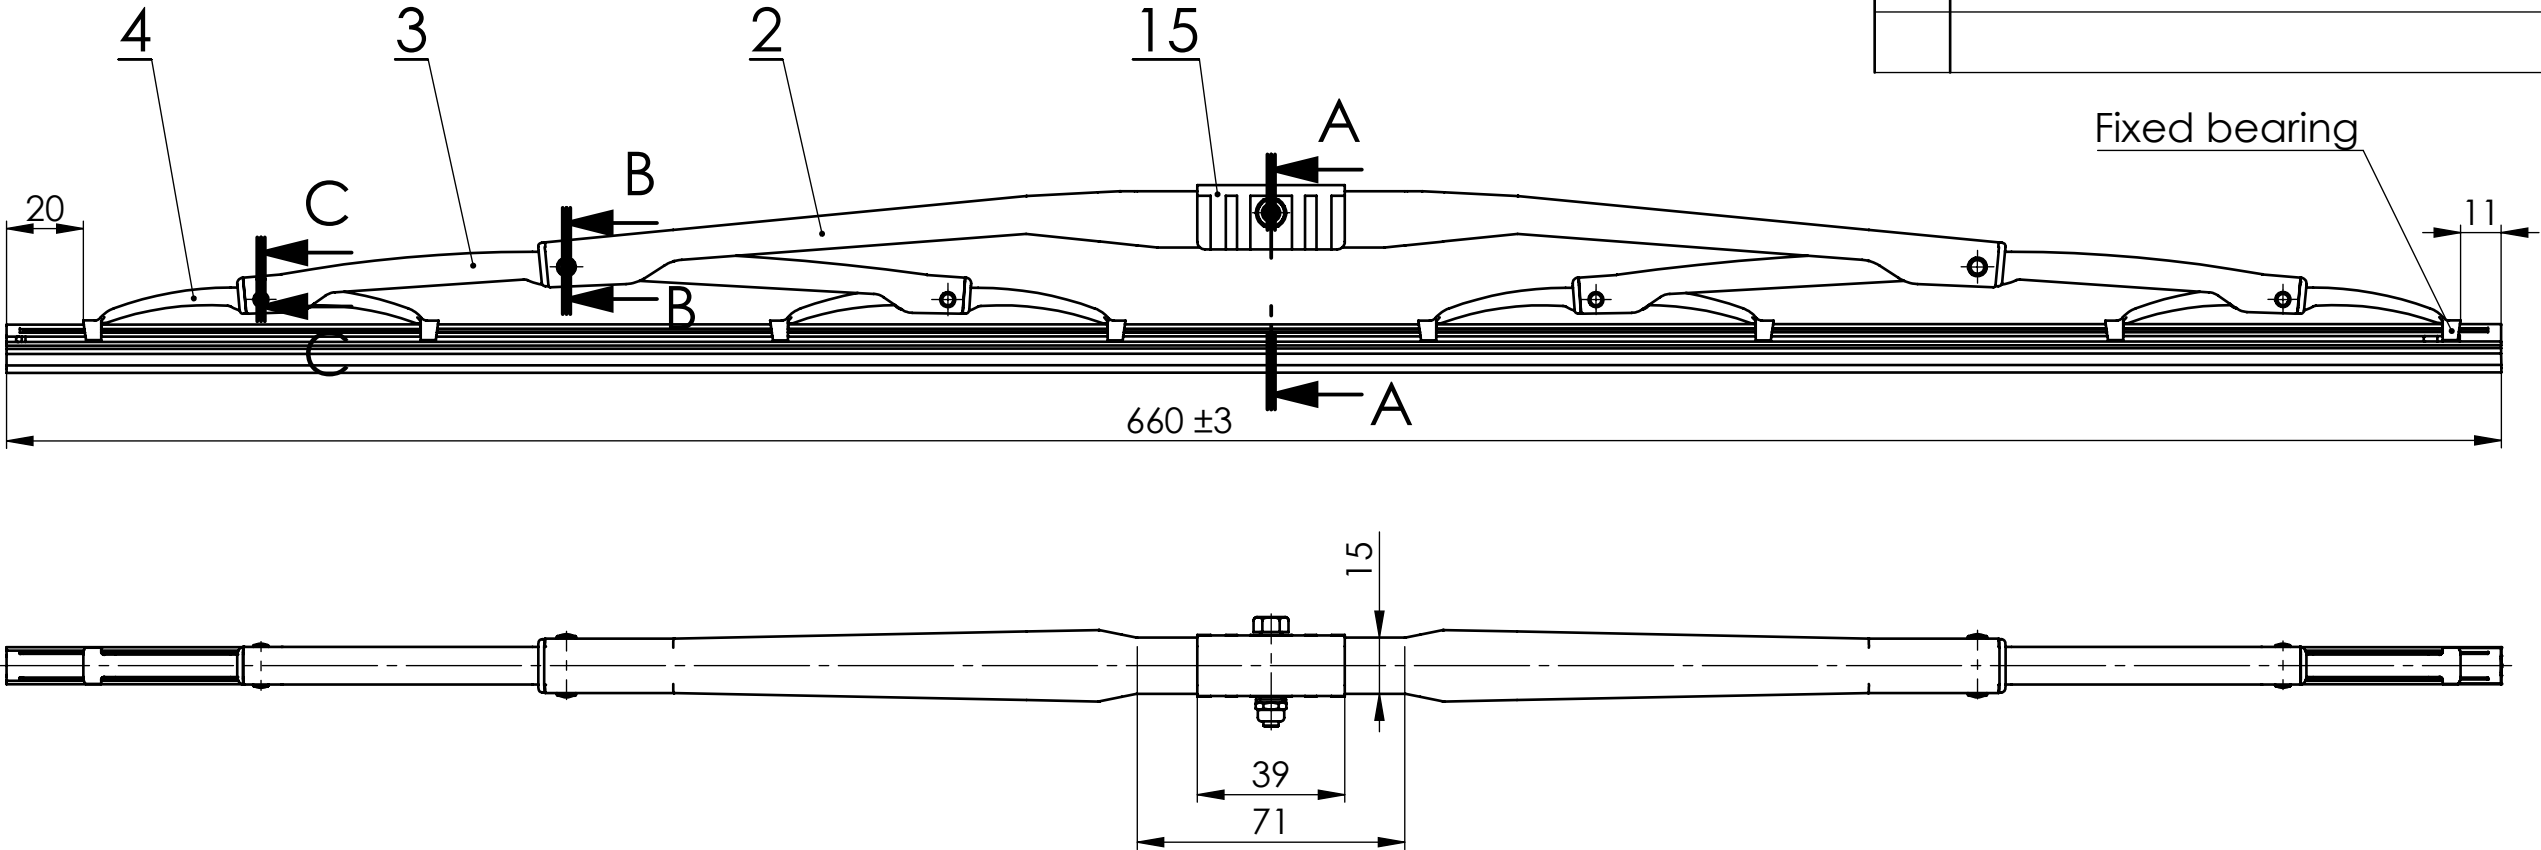

Test specification to EDS-M-7501
Wiper performance EDS-T-3402
*FAPROXYD 620 MAT MOT-GUM CZA RNA RAL 9005
Polyester powder paint
Gloss 12-23 (GE at 60°)
Thickness 60-80 [µm]

15	Adaptor	1	PBT		U1	
14	Sleeve	4	PBT		800.01.13	
13	Sleeve	8	PBT		800.01.12	
12	DIN EN ISO 10511 - M4 - N	1				
11	Washer 4,3	1	A2	DIN 125A		
10	Screw M4	1	EN 1.4301	EN 10088-1	601.02.03 N	
9	Side spring	2	EN 1.4310	EN 10088-1	660.01.04	
8	Rivet	4	EN 1.4567	EN 10088-1	550.01.04	
7	Rivet	2	EN 1.4567	EN 10088-1	500.01.07	
6	Joint	2	PBT		500.01.06	
5	Joint	4	PBT		500.01.05	
4	Side lever	4	DX51D+Z275#0,7	EN 10346	500.01.04	*
3	Sublever	2	DX51D+Z275#1,0	EN 10346	660.01.03	*
2	Main lever	1	DX51D+Z275#1,2	EN 10346	700.02.02	*
1	Rubber	1	Rubber		660.01.01	
Pos.	Part	Qty	Material	Norm	Drw. no.	Covers
	Name	Date	Sign	Name: Wiper blade 660mm		General Tolerances ISO 2768-C
Dsgn.	S.Bogucki	2023-07-25		Drw. no.: 660.13.00		MOTGUM Józefów
Chk.	K.Kowalewski	2023-07-25				Scale 1:2
Acpt.	W.Godlewski	2023-07-25				Weight [kg]
						Format A3