



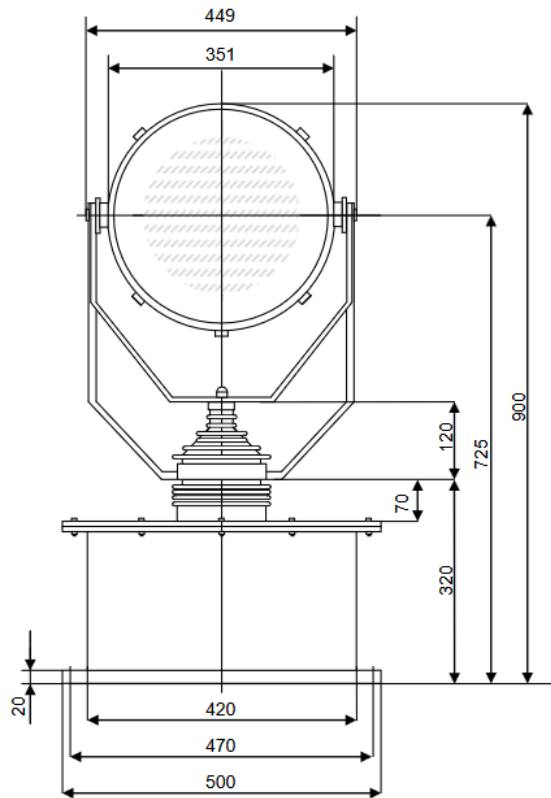

EFA 351 HGS 230 V -1000 W

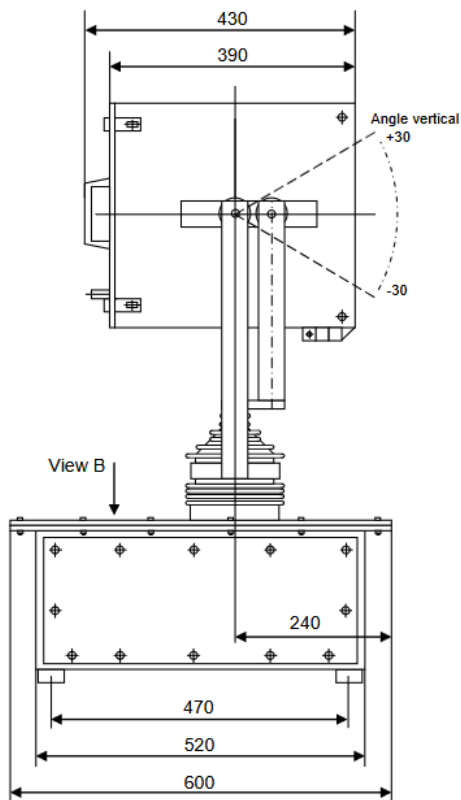

Pesch Marinescheinwerfer
Ortsring 2
D - 21423 Winsen/Luhe

Tel.: +49 4171 5684
E-Mail: sales@seematz.de
<https://www.seematz.de>



EFA 351 HGS

230 V -1000 W

Type: EFA351HGS2301000

Electrical data: 230V 1000W Gx9,5

Motor Control: type 24VDC

Construction features :

Case and all other aluminium parts are made of ALMg3, non magnetic.

Reflector:

high-polished aluminium 99,99%, anodized,
diameter 275mm, focal distance 120mm

Front Pane:

bi-vetral glas, resistant to temperature changes

Sealing:

Seal for front Pane: silicone tube

Seal for plug-in unit: square bar rubber

Lampsocket:

Gx9,5

Electrical Equipment:

Halogen Lamp 1000 W

Burning Position vertical

Technical data lamp:

Power	1000 VA
Voltage	230 V
Current intensity	4.35 A
Luminous flux	20500 lm
Average burning life	750 Hours

Searchlight:

DIN-Range at 1 Lux:	740 m
IES-Range at ¼ Lux :	1490 m
Beam with at 50 % Imax:	6°
Light spot size at target	±70 m
Power input 230V 1000 VA	
Protective System IP 56	

Turning range:

Horizontal :	+/- 165° (optional up to +/-190°)
Vertical :	+/- 30° (optional +/-35°)

Swiveling time horizontal approx 20 sec for 330°

Swiveling time vertical approx 45 sec for 60°

Motor control:

Power	100 W
Voltage	24 VDC

Options:

-additional turning range